

Request to Exit Button Range



Dual Unit - Button & EDR

Technical specifications

- High impact plastic back box (robust design)
- Double pole contact N/O-N/C at 30vac/dc
- Designed for greater than 1 million operations.
- Wear resistant legend.
- Security screws (Allen key type)


Approval : EN 50133 Industrial Codes of

- Triple pole (EDR)
- Includes audible/LED (selectable)
- 12/24V Operation.
- Includes plastic front covers which flip up for operation.

Approval : EN 50133 Industrial Codes of

DU-GB/PTE	160x90x42/37(mm)	Standard green button	PRESS TO EXIT	368g (Boxed) / 290g (Unboxed)
DU-NT/TF	160x90x42/37(mm)	Touch free	TOUCH FREE EXIT	384g (Boxed) / 302g (Unboxed)
DU-SS/PTE	160x90x42/37(mm)	Stainless steel button	PRESS TO EXIT	376g (Boxed) / 298g (Unboxed)

Other items in the RGL range.

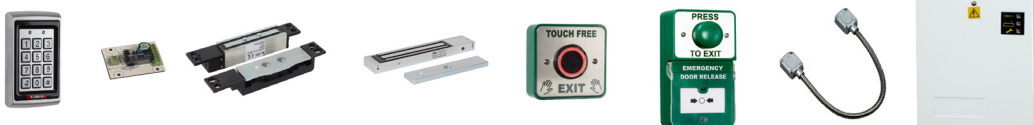

Access Control

FEATURES

- All one colour.
- Easy clean surface.
- Screw footprint for surface fitting onto standard back box.
- Saves labour time on wiring.
- DU-GB/PTE
- green dome button
- DU-SS/PTE
- stainless steel button
- DU-NT/TF
- touch free operation
- Adjustable timer (0.5 to 20 secs)
- Adjustable distance (3 to 12 cm)

