

PC23

control panel platform

DMR-IND

three phase industrial control panel



dead man system which operates with transmitters and complies with the current regulations




Applicable to
industrial roller shutters · industrial sectional doors



jcmtechnologies

Dead man with radio range adjustment
It complies with the current regulations (EN 60335-1:2012)

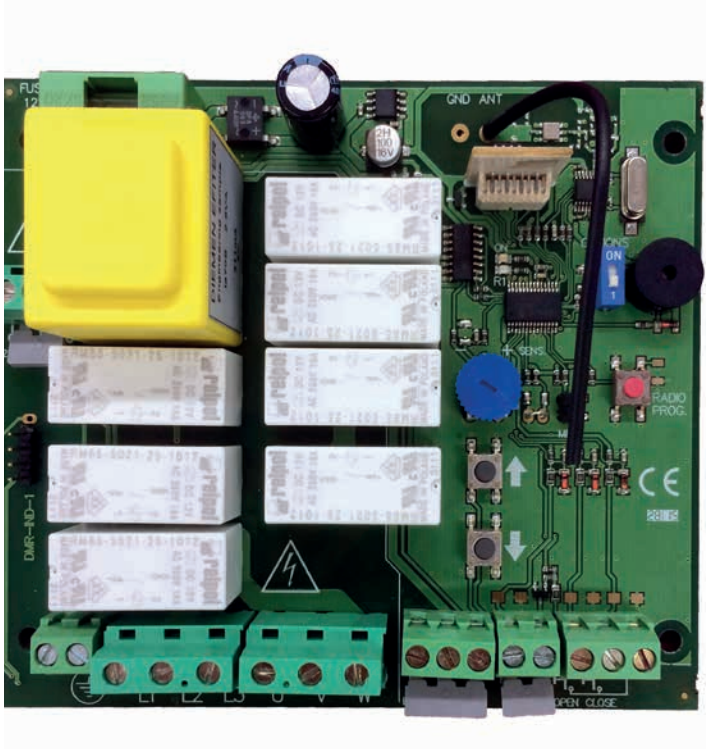

- Industrial control panel for roller shutters and sectional doors.
- Dead man adjustable activation range from transmitter using a potentiometer.
- Operable with a dead man function or mixed semi-automatic (automatic open, close dead man) by using optional selector.
- It has no safety inputs.
- It works with dead man transmitters.
- Integrated 27 code receiver. Motion 868 MHz, capable of being increased to 500.
- Power supply: single phase 230V, three phase 400V (1200W).
- Number of channels: 2 (OPEN and CLOSE).

Application:

Industrial roller shutter with dead man transmitters

