



C Prox Ltd (inc Quantek)




59 Sheffield Road, Dronfield, S18 2GF

+44(0)1246 417113 sales@cproxltd.com www.quantek.co.uk

NEW Resistive Edge Gate Safety System

Techno

The Techno line resistive edge is entirely made of co-extruded plastic with a IP67 micro switch included inside. They Are light, simple to install and easily cut down to size. Suited to overhead doors and swing gates and due to its high water resistance can be used externally!


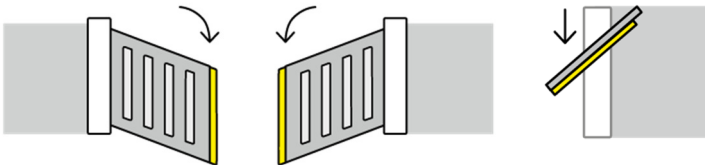


Specifications:

- Available in 2000mm and 2500mm Lengths
- IP67 Protection IP67 internal NO 8k2 switches provide a CAT 3 safety edge system
- Join multiple edges together

Compact CND

Our compact safety edge is easy to install and can be cut down at will. It uses an inner TPE conductive profile on a small and discreet body, which guarantees a quick response to every impact. It is also available with an integrated wireless transmitter.


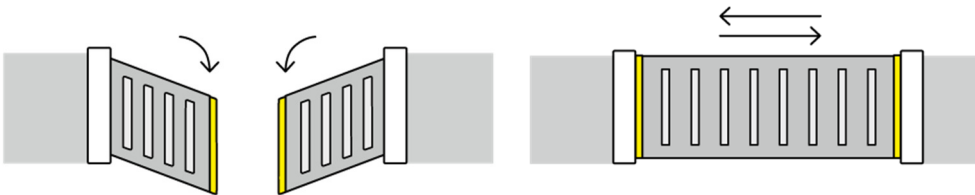


Specifications:

- Available in 1200mm, 2000mm and 2500mm Lengths
- IP65 Protection
- -20c to +55c Temperature

Maxi CND

The Maxi CND had been designed to be used on heavy and large sliding gates. It features an inner TPE conductive profile which guarantees a quick response to every impact. The bar can be cut down at will and is also available with an integrated wireless transmitter

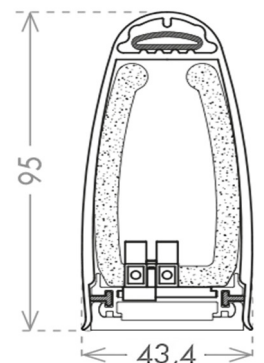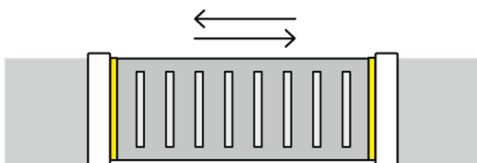

Specifications:

- Available in 2000mm and 2500mm Lengths
- IP65 Protection
- -20c to +55c Temperature

All the above are compatible with our safety edge receivers and transmitters