




C Prox Ltd (inc Quantek)

Unit 11 Callywhite Business Park, Callywhite Lane, Dronfield, S18 2XP

+44(0)1246 417113 sales@cproxltd.com www.quantek.co.uk

GT1 Instructions

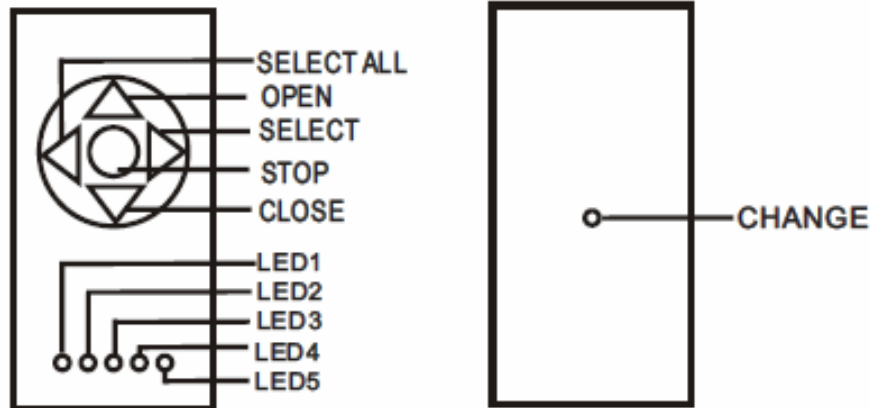

1. When press SELECT , the indicate led light flash ,and the press SELECT , it will skip to next led light flash . When press OPEN , the indicate motor will run open , and press STOP or CLOSE key , the motor will stop . When press CLOSE , the indicate motor will run close , and press OPEN or STOP key , the motor will stop .
2. When press SELECT ALL , all the LEDs will flash . When press OPEN , all the motors will run open , and press STOP or CLOSE , all the motors will stop . When press CLOSE , all the motors will run close , and press OPEN or STOP , the motors will stop.
3. When the motor power on , then press SELECT to select the correspond channel , then press and hold the [OPEN] and [CLOSE] keys over 2 seconds then release , the correspond motor will run open for 1 second then run close for 1 second , this transmitter channel call "MASTER" channel . only this transmitter correspond channel will learn into the control board , other codes in control board will erase , when power on and no operation to control board over 30 seconds , this function will exit .
4. When you want to add transmitter code into control board , press SELECT to select the "MASTER" channel , then press and hold the [OPEN] and [CLOSE] keys over 2 seconds then release , the correspond motor will run open for 1 second then run close for 1 second , the learn function will open , then press SELECT to select the correspond channel you want to add , press and hold [OPEN] and [CLOSE] keys over 2 seconds then release , the correspond motor will run open for 1 second then run close for 1 second , learn function finish . If learn function open and no operation to control board over 30 seconds , this function will exit .
5. When you want to change motor run direction , press SELECT to select "MASTER" channel , press and hold [OPEN] and [CLOSE] buttons for 2 seconds then release , the correspond motor will run open for 1 second then run close for 1 second , the learn function will open , then press and hold the "MASTER" channel [CHANGE] button by a small needle over 2 seconds then release , the correspond motor will run open for 1 second then run close for 1 second , change motor run direction function finish . If learn function open and no operation to control board over 30 seconds , this function will exit .