



## C Prox Ltd (Inc Quantek)

11 Callywhite Business Park, Callywhite Lane, Dronfield S18 2XP  
+44(0)1246 417113 sales@cproxltd.com www.quantek.co.uk

### R112DC & R224DC

12v & 24v Optocoupler Relay Modules.




These units function as both a Low-level trigger or High level trigger by using the jumper or insert link & use as conventional relay.

**NB: Units come with double sided adhesive stickers.**

#### Features:

- Maximum load: AC 250V/10A, DC 30V/10A
- SMD optocoupler isolation
- stable performance
- trigger current 5mA
- Operating voltage 12V or 24V
- high or low trigger by a jumper setting
- Fault-tolerant design.
- Power indicator LED (green)
- status indicator LED (red)
- module size: 50mm\*26mm\*18.5mm (L\*W\*H)

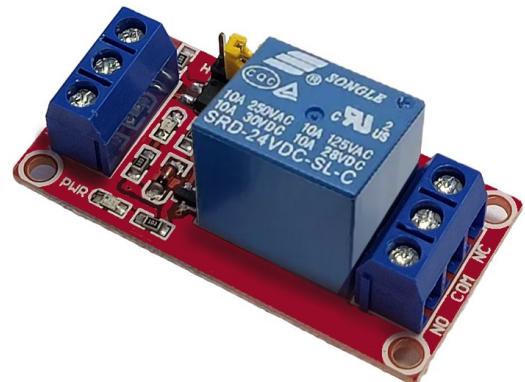

#### Interface:

1. VCC: Positive (DC+)
2. GND: Negative (DC-)
3. IN Signal input trigger can be high or low level

#### Outputs:

1. NO Normally open relay interface
2. COM Relay Common Interface
3. NC Normally closed relay interface