

## HARDWIRED


- 12 – 28Vdc
- Adjustable timed clean relay outputs
- Selectable red, green or blue LEDs
- Sounder on activation
- Hard coated anti-microbial acrylic label
- Entire label is sensitive
- IP65 rated
- Suitable for single & double glazing – not suitable on UPVC frames or Low E treated glass

Code: [GASS](#)

## WIRELESS

- 868MHz
- 4 x AA alkaline batteries (supplied)
- Approximately 60,000 + operations
- Green LED & sounder on activation
- Battery saving design, unit will only transmit once if hand left on
- 50mm defined detection area
- IP65 rated
- Suitable for single glazing – not suitable on UPVC frames or Low E treated glass

Code: [GTXASS](#)

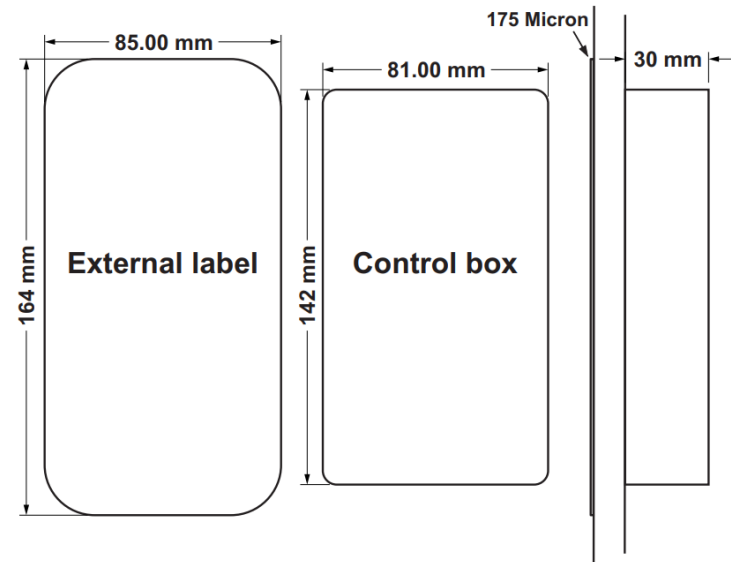

## THROUGH GLASS SENSORS

The label is attached to the outside of the glass and the control box is attached internally. Our sensors offer protection against a range of bacteria including E. coli, MRSA, Salmonella and Legionella, as well as black mould growth, biofilm and fungi. Our acrylic signage is protected by antimicrobial technology which means 99.9% of germs will not grow on them. We also design bespoke labels, which can include company names and logos.

