

SQWCRADAR

Instruction Manual





- Weather-resistant and heavy-duty construction for lasting reliability.
- Smooth, quarter turn operation – easier to use than mechanical locks.
- 316 stainless steel escutcheon and internal components for durability.
- Dual waterproof microswitches wired in series for enhanced security.
- Accepts all official RADAR keys with no risk of jamming.
- Clear LED indicators – green for activation, red and blue for engaged/vacant.
- Designed to aid colour blind users with dual colour LED status.
- For use with our toilet control board, which controls the lock and automatic door operator.


Installation:

1. Ascertain fixing height. Use the box to mark the four fixing points.
2. Use knockout and place cable through.
3. Secure box to the wall with 4 x No8 (4mm) screws.
4. Make connections (see next pages).
5. Place signage plate back into the box and insert the two screws. **Do not over tighten screws!**
6. Place screw covers over the screws.

General Wiring:

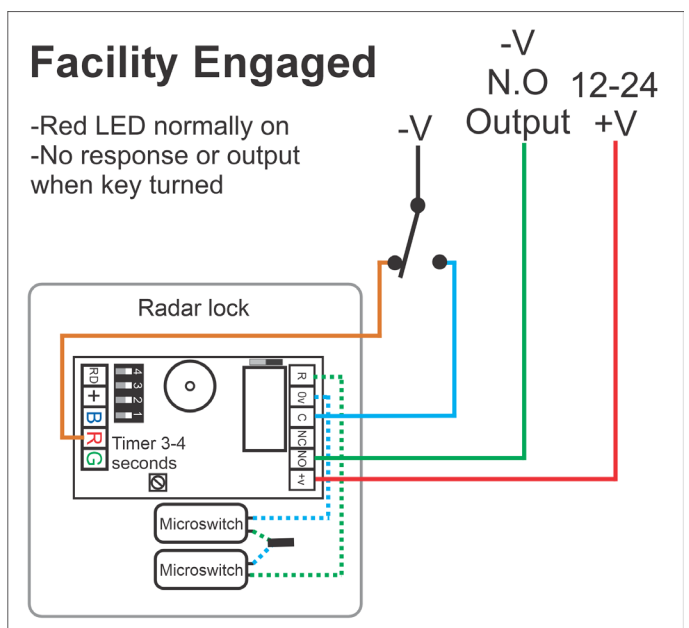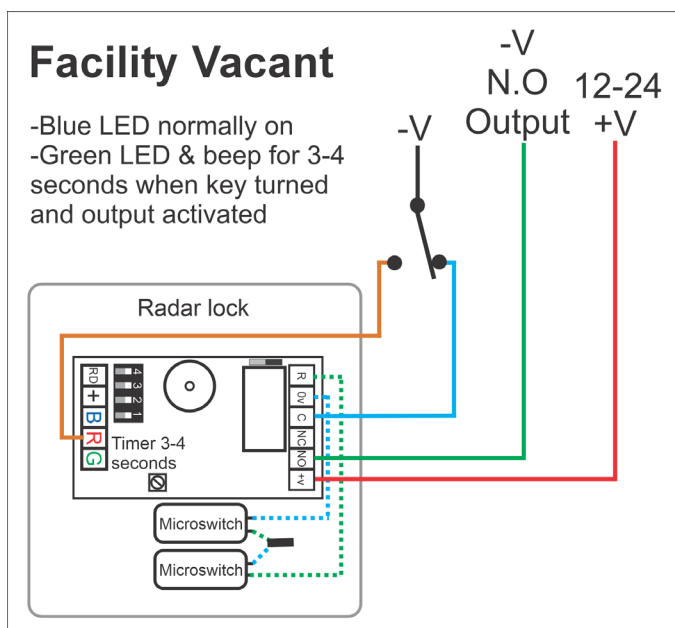

WCPCB Wiring:

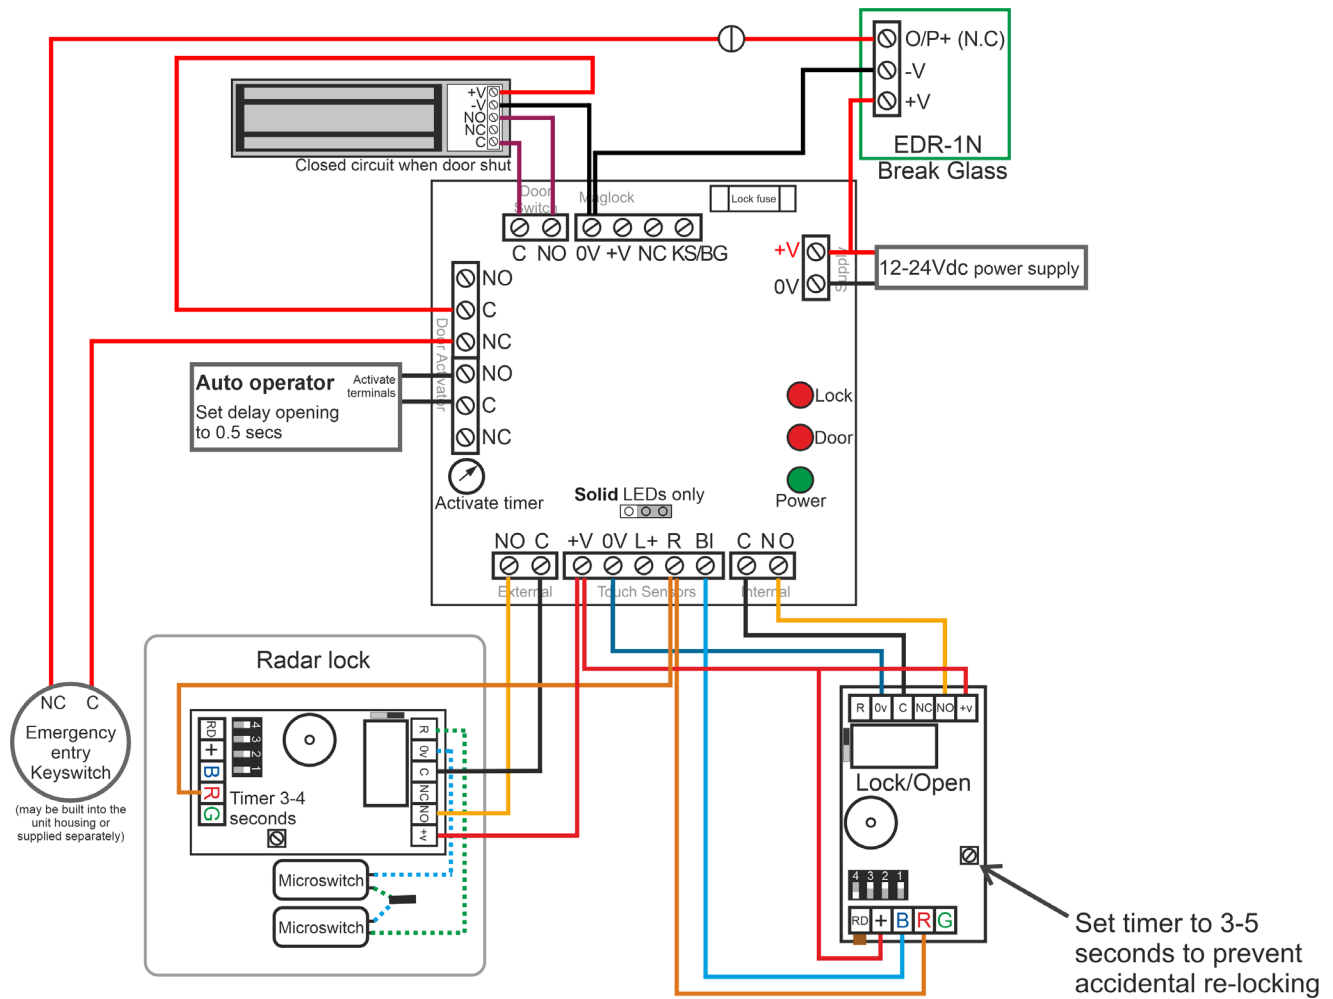

WCRXPCB Wiring:

