



C Prox Ltd (inc Quantek)


Unit 11 Callywhite Business Park, Callywhite Lane, Dronfield, S18 2XP

+44(0)1246 417113 sales@cproxltd.com www.quantek.co.uk

D6D3 Call Point





1. Front view

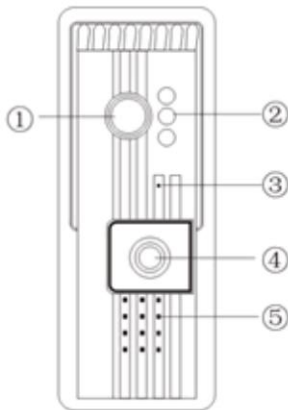

- ① Camera
- ② Infra-red lamp
- ③ MIC
- ④ Call button
- ⑤ Speaker

2. Rear view

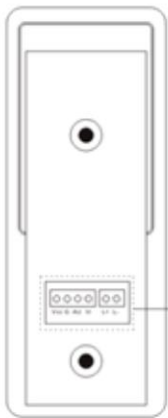

- ⑥ Wire terminals
- ⑦ 30W connect with lock, high level is effective, consumption 30W.

- Vi Video line connect with indoor phone Vi
- AU AU talking, calling and unlock line, connect with indoor phone AU
- G A common line, connect with indoor phone G
- 12V Power supply of door unit, connect with indoor phone 12V
- L+ Connects with lock. This line can be the signal line if it's not used for the lock, high level is for unlocking.
- L- Connect with lock. This line can be the common line if it's not used for the lock.


Functions:

- Two way communication
- Unlock
- Transmit video image
- Power indicator
- IR camera
- Heavy duty, vandal proof

Specification:

Temperature	-40°C~70°C
Relative humidity	45%~95%
Atmospheric pressure	86Kpa~108Kpa
Fire endurance rating	IP33
Working voltage	DC12V
Static current	0.17mA
Working current	150mA
Camera	Color 420L; B/W 480L
Dimension	180×70×50mm
N.W	845g

Installation:

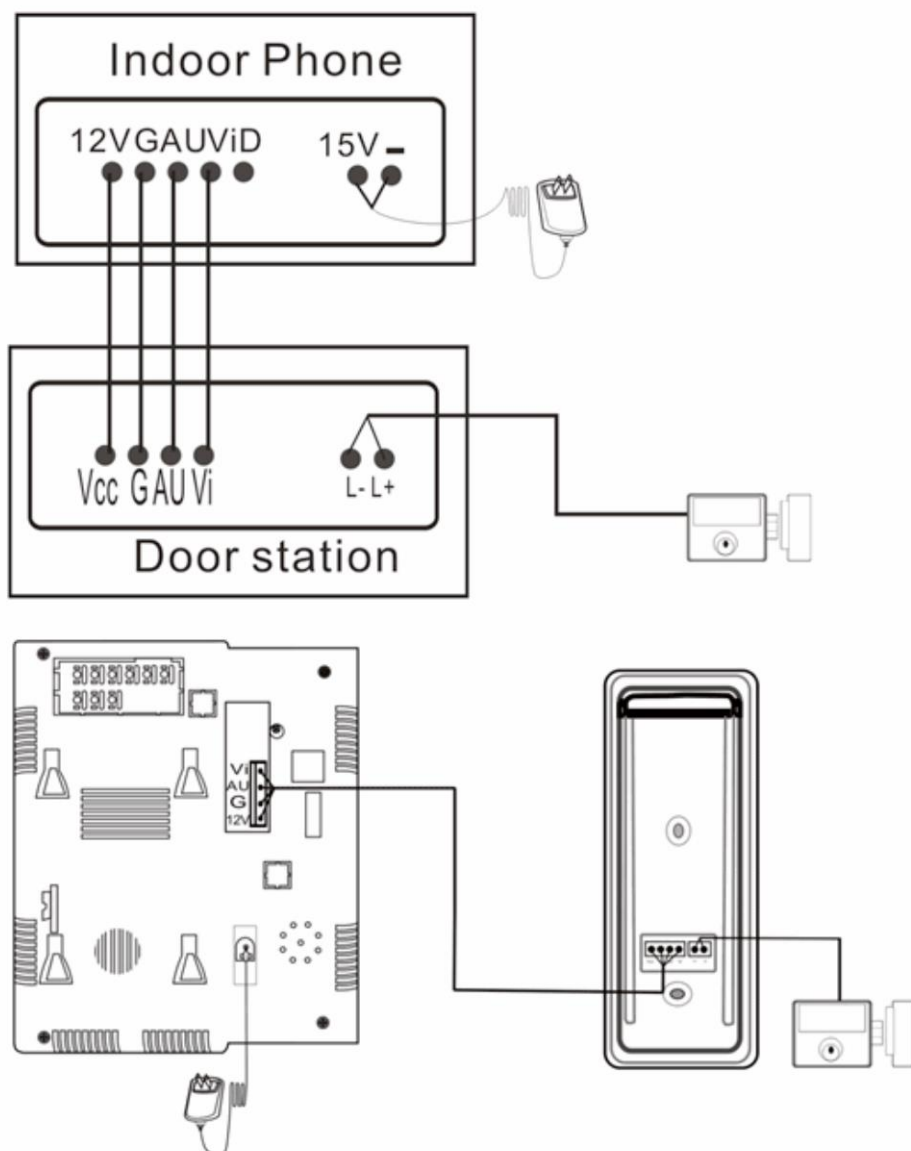

Operation:

Calling: Press 'Call' button to call indoor phone and talk with the householder. They can then unlock the door by pressing the 'Unlock' button.